


Calibration Columns with Fixed Caps

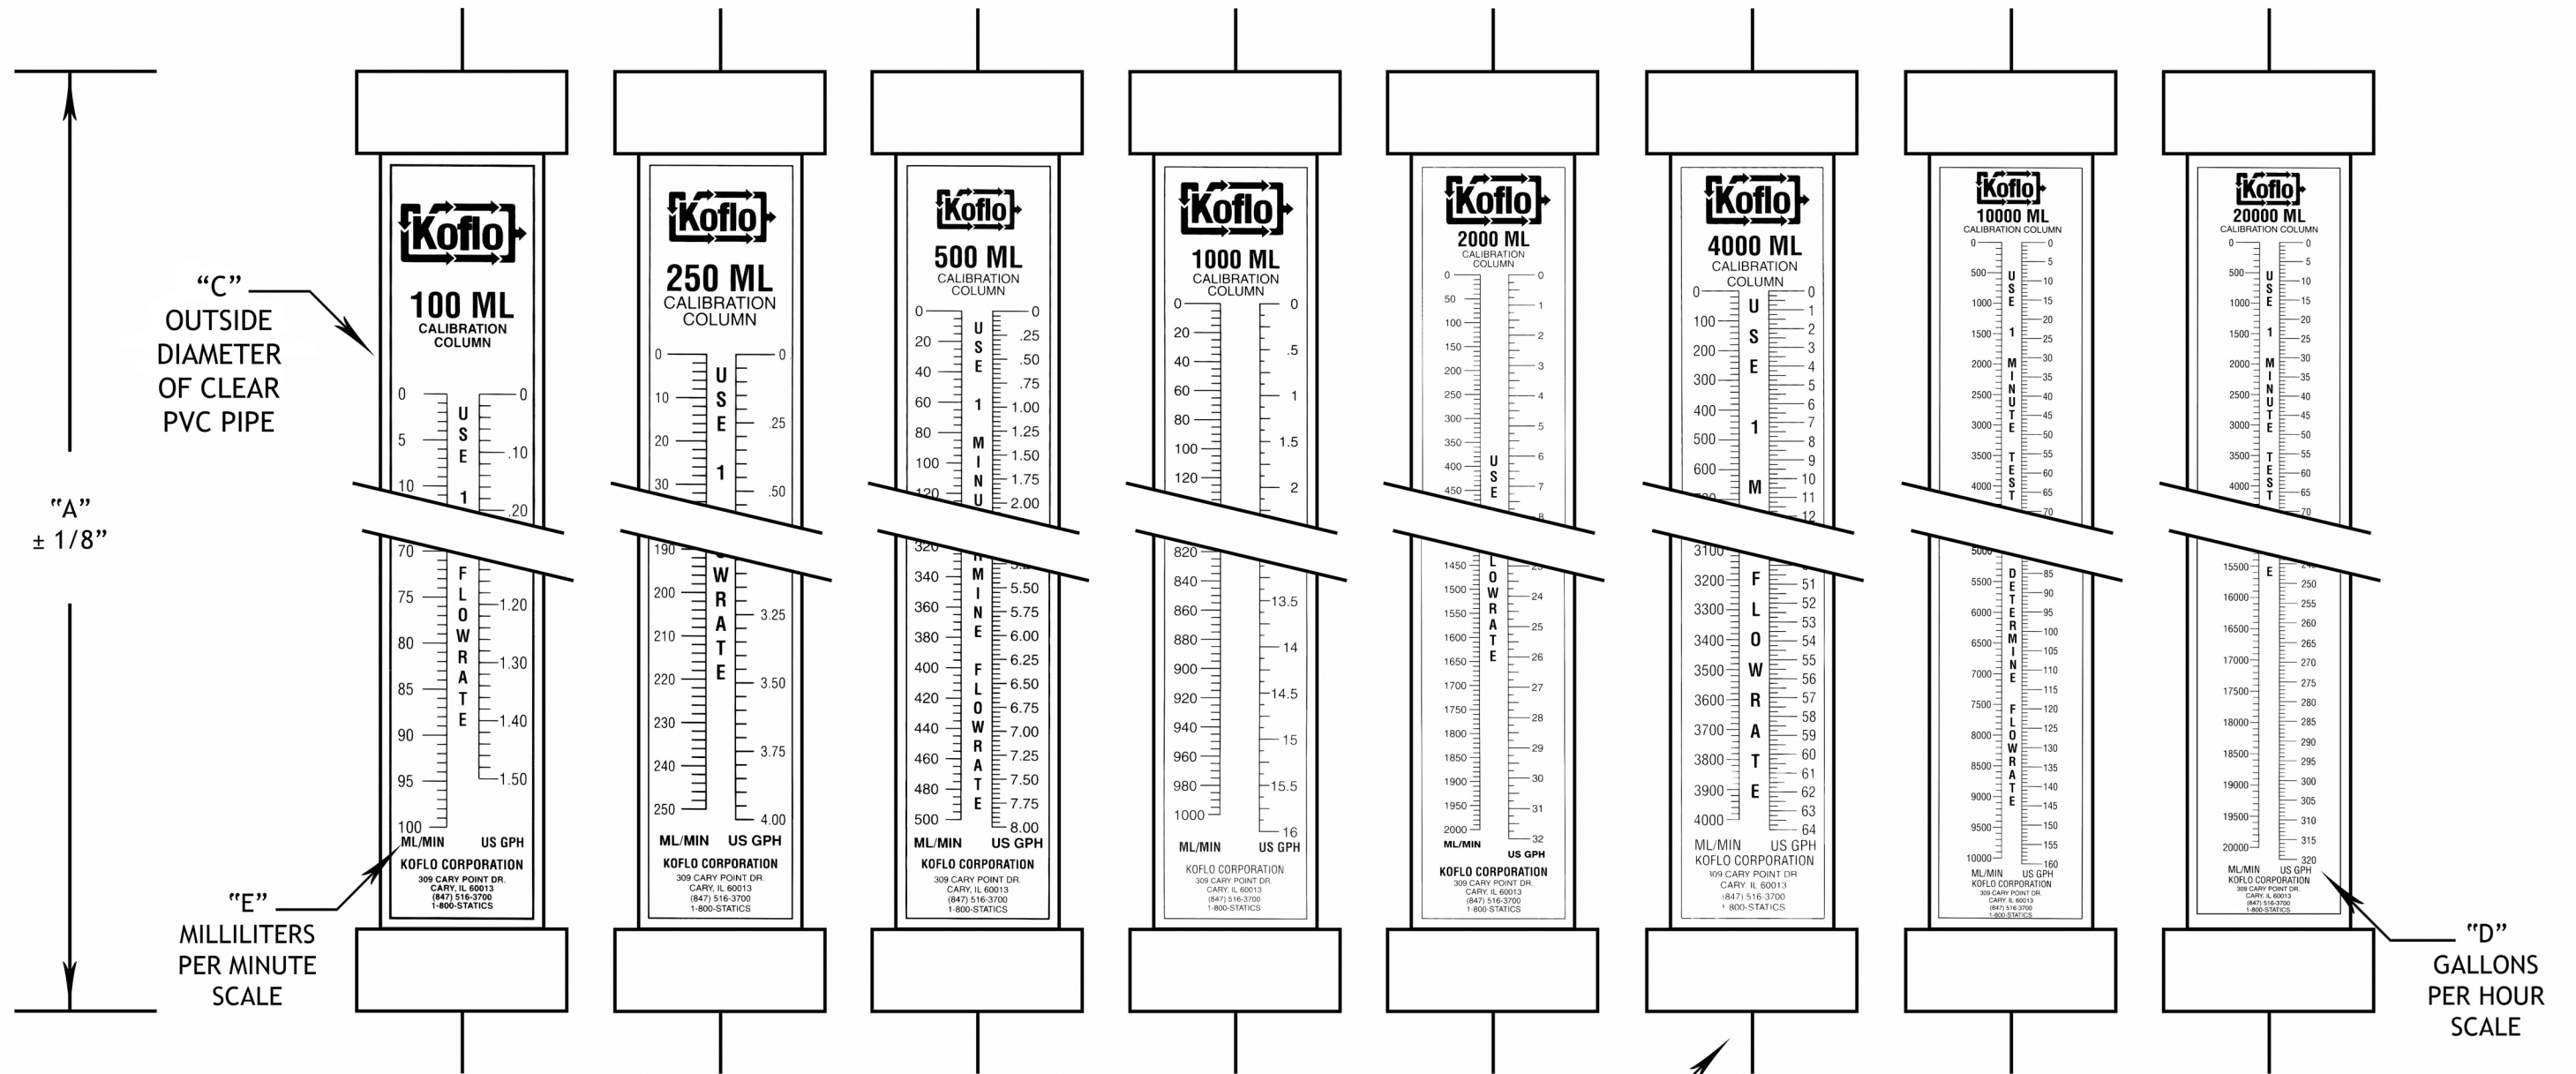

"A"
± 1/8"

"C"
OUTSIDE
DIAMETER
OF CLEAR
PVC PIPE


"E"
MILLILITERS
PER MINUTE
SCALE

"D"
GALLONS
PER HOUR
SCALE

"B"
FNPT CONNECTIONS
TOP AND BOTTOM

NOTE: - USE ONE (1) MINUTE TEST TO DETERMINE FLOWRATE
- CALIBRATION COLUMNS ARE USED IN GRAVITY SYSTEMS OPEN TO THE ATMOSPHERE AND THEREFORE ARE NOT PRESSURE RATED

MODEL	"A"	"B"	"C"	"D"	"E"	INCREMENTS
100 ML	12-1/2"	1/2"	1.315"	1.5	100	1 ML / 0.020 GPH
250 ML	16-1/4"	1/2"	1.660"	4.0	250	2 ML / 0.050 GPH
500 ML	16"	3/4"	2.375"	8.0	500	5 ML / 0.050 GPH
1000 ML	25"	3/4"	2.375"	16.0	1,000	5 ML / 0.125 GPH
2000 ML	24"	1"	3.500"	32.0	2,000	10 ML / 0.250 GPH
4000 ML	34"	1"	4.000"	64.0	4,000	20 ML / 0.250 GPH
10000 ML	27"	2"	6.625"	160.0	10,000	100 ML / 1.000 GPH
20000 ML	46"	2"	6.625"	320.0	20,000	100 ML / 1.000 GPH

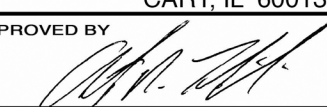Koflo Corporation 309 CARY POINT DR. CARY, IL 60013		
SCALE: NONE	APPROVED BY: 	DRAWN BY: N.J.F
DATE: 2/6/07		REVISED: 8/7/07
CUSTOMER:		REVISED: 11/24/10
		REVISED: 8/14/14
MODEL NO: PVC CALIBRATION COLUMNS WITH FIXED CAPS		DRAWING NUMBER KD-1032